



## Aluminum Full View Doors

Amarr® 3552 / Amarr® 3502

**Amarr 3552 and 3502 Aluminum Full View doors** are constructed of 2" thick extruded aluminum rails and stiles and can be fitted with a variety of full-view glass options, solid aluminum, perforated or louvered ventilation panels. Perfect for automotive showrooms and repair centers, service stations, car washes, fire houses, restaurants, and sports complexes; our aluminum doors create a clean style for any facility. These doors can be mounted stationary or operative as a stylish alternative for al fresco situations.

The **ClearView Aluminum Strut System** provides added strength and durability to larger Amarr 3552 door sizes up to 24' 2", without restricting the viewing area.



Amarr 3552 with two Louvered Aluminum bottom sections.


**CONSTRUCTION**

**Amarr 3552**


Heavy-duty Aluminum door

- 2" thick extruded aluminum rails & stiles
- Available in 1" width increments
- Available in odd heights

Amarr 3552



Amarr 3502



**Amarr 3502**

Medium-duty Aluminum door

- 2" thick extruded aluminum rails & stiles
- Available in 1" width increments

**Track:** All Amarr doors are available with both 2" or 3" track in Standard Lift, High Lift, Vertical Lift, Low Headroom, and Follow the Roof Pitch. Custom track configurations are also available. For drawings and more information, please visit [www.amarr.com](http://www.amarr.com).

**Springs:** Torsion springs are oil tempered, helical wound and custom computed for each door for a minimum 10,000 cycle life. Optional springs are available up to 100,000 cycle life.

**Hardware:** Amarr hardware includes minimum 14-gauge galvanized steel hinges and 13-gauge galvanized steel track brackets. All rollers have minimum 10-ball bearings.

**SPECIFICATIONS**


	Heavy-duty <b>Amarr 3552</b> formerly 3550	Medium-duty <b>Amarr 3502</b> formerly 3500
<b>MATERIAL</b>	Aluminum	Aluminum
<b>CONSTRUCTION LAYERS</b>	Single	Single
<b>PANEL OPTIONS</b>		
Full View	•	•
Perforated	•	
Louvered Ventilation	•	
Aluminum	•	•
Insulated Aluminum	•	
<b>DOOR THICKNESS</b>	2" (5.1cm)	2" (5.1cm)
<b>MINIMUM WIDTH</b>	2'	2'
<b>MAXIMUM WIDTH</b>	24' 2"	12' 2"
<b>SECTION HEIGHTS<sup>1</sup></b>	18", 21", 24"	21", 24"
<b>MINIMUM HEIGHT</b>	6'	6'
<b>MAXIMUM HEIGHT</b>	20' 1"	12' 1"
<b>WIND LOAD<sup>2</sup> AVAILABLE</b>	•	•
<b>FINISH WARRANTY<sup>3</sup></b>	5 Years	5 Years
<b>WORKMANSHIP/HARDWARE WARRANTY<sup>4</sup></b>	1 Year	1 Year

<sup>1</sup> For complete door height configuration chart, visit [amarr.com](http://amarr.com) or contact your local Amarr dealer.

<sup>2</sup> It is your responsibility to make sure your garage door meets local building codes.


<sup>3</sup> For complete warranty details, visit [amarr.com](http://amarr.com) or contact your local Amarr dealer.

**PANEL OPTIONS**

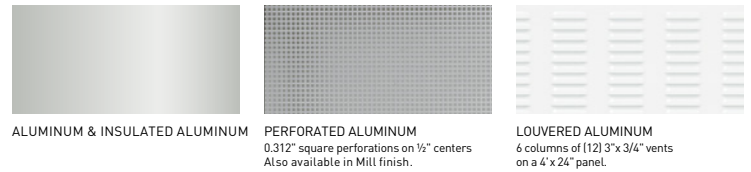

**ANODIZE FINISHES**

Actual color may vary from samples shown.



Amarr 3502 available in clear anodize only.

\*Special order; longer lead time and price upcharge apply.

**PAINT FINISHES (PVDF AND POWDER COAT)**

Amarr 3552 only. Actual color may vary from samples shown.



RAL and custom powder coat colors available.

†PVDF only; longer lead time and price upcharge apply.

**GLAZING OPTIONS**

	Amarr 3552 formerly 3550	Amarr 3502 formerly 3500
<b>DSB GLASS</b>		
Single or Insulated	•	Single Only
Tinted (Bronze, Gray or Green)	•	•
<b>TEMPERED GLASS</b>		
Single or Insulated	•	Single Only
Tinted (Bronze, Gray or Green)	•	•
<b>OBSCURE GLASS</b>		
Single or Insulated	•	Single Only
<b>THERMAPRO LOW-E GLASS</b>		
Single or Insulated	•	Single Only
Tinted (Bronze, Gray or Green)	•	•
<b>POLYCARBONATE GLAZED</b>		
Single or Corrugated	•	Single Only
<b>LAMINATED GLAZED</b>	•	•
<b>ACRYLIC GLAZED</b>	•	•
<b>CUSTOM OPTIONS</b>	•	•

ADDITIONAL GLAZING OPTIONS AVAILABLE.



**Entromatic**  
165 Carriage Court  
Winston-Salem, NC 27105  
800.503.DOOR  
[www.amarr.com](http://www.amarr.com)

FOR TECHNICAL  
QUESTIONS:  
1.866.366.4814



Sectional door products from Entromatic may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Entromatic and Amarr as words and logos are trademarks owned by Entromatic Group AB or companies within the Entromatic Group. Technical data subject to change without notice.

©Entromatic Group AB 2016. All rights reserved. Printed in USA Form #6220416/20M/GVS